WEIHAO
SWITCHING POWER SUPPLY
伟豪开关电源
www.wehopower.com

DR-45W单组输出导轨电源
DR-45W Single output DIN rail power supply

概述 Summary

> 单组输出：功率45W
Single output: power 45W

> 输入电压：85～264VAC 120～370VDC
Input voltage: 85～264VAC 120～370VDC

常见规格 General Specification

78×93×56mm

型号 Model / 性能 Specification	DR-45-5	DR-45-12	DR-45-15	DR-45-24
直流输出电压、电流 DC output voltage, current	5V 0～5A	12V 0～3.5A	15V 0～2.8A	24V 0～2A
纹波及噪音 Wave and noise	80mVp-p	120mVp-p	120mVp-p	150mVp-p
进线稳定度 Inlet wire stability	±0.5%	±0.5%	±0.5%	±0.5%
负载稳定度 Load stability	±1%	±0.5%	±0.5%	±0.5%
效率 Efficiency	72%	77%	77%	80%
直流电压可调范围 Adjustable range for DC voltage	±10%	±10%	±10%	±10%
输入电压范围 Input voltage range	85～264VAC 120～370VDC 47～63Hz			
冲击电流 Impact current	冷启动电流 Cold start current 28A/115VAC 56A/230VAC			
过载保护 Overload protection	105%～150%切断输出，自动恢复 105%～150% cut off the output, automatic recovery			
过电压保护 Over voltage protection	115%～135%关闭输出，电源重启后可恢复输出 115%～135% shut down O/P voltage, re-power on to recover			
启动、上升、保持时间 Setup, rise, hold up time	800ms, 60ms, 50ms/230VAC 满负载 at full load			
耐压性 Withstand voltage	输入输出间：1.5kV 输入与外壳间：1.5kV 输出与外壳间：0.5kV 一分钟 I/P-O/P: 1.5kV I/P-FG:1.5kV O/P-FG: 0.5kV 1minute			
隔离电阻 Isolation resistance	输入输出间 输入与外壳间 输出与外壳间：500VDC/100MΩ I/P-O/P I/P-FG O/P-FG: 500VDC/100MΩ			
工作温度 Working temperature	-10℃～+50℃			
尺寸 Dimension	78×93×56mm			
重量 Weight	0.27kg			
包装 Packing	43×32×21.5CM/45PCS/12.5kg			

外形尺寸 Overall dimension(mm)

- 接线位置
  - 端口 1,2：交流输入
  - 端口 3,4：直流输出+V
  - 端口 5,6：直流输出-V
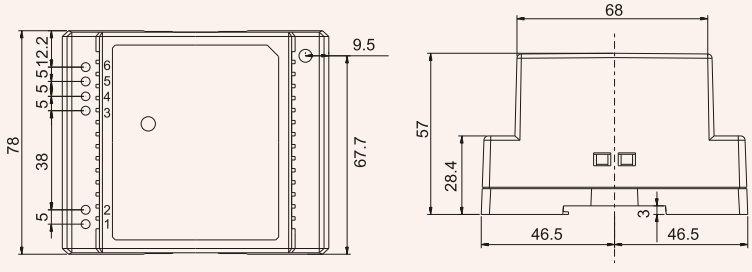
- Terminal Pin No.Assignment
  - Pin 1,2：AC input
  - Pin 3,4：DC output+V
  - Pin 5,6：DC output-V